DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11535558

Frame	: 143/5TC	Locked rotor time	: 25s (cold) 14s (hot)
Output	: 1.5 HP (1.1 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 1.68 A	Protection degree	: IP55
L. R. Amperes	: 14.1 A	Cooling method	: IC411 - TEFC
LRC	: 8.4x(Code L)	Mounting	: F-1
No load current	: 0.960 A	Rotation[1]	: Both (CW and CCW)
Rated speed	: 1755 rpm	Noise level[2]	: 51.0 dB(A)
Slip	: 2.50 %	Vibration	: A
Rated torque	: 0 kgfm	Starting method	: Direct On Line
Locked rotor torque	: 290 %	Approx. weight[3]	: 22.0 kg
Breakdown torque	: 350 %	Painting plan	: 207A (ISO 12944 - C3)
Insulation class	: F	Color	: RAL 5009
Service factor	: 1.25	Design	: B
Moment of inertia (J)	: 0.0060 kgm²		

Output	50%	75%	100%
Efficiency (%)	82.5	85.5	86.5
Power Factor	0.54	0.67	0.76

Foundation loads

Max. traction : 51 kgf

Max. compression : 73 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
14.7	12.1	12.0	8.7	6.1	4.9	3.6

		Drive end	Non drive end
Bearing type	:	6205 ZZ	6204 ZZ
Sealing	:	V'Ring	V'Ring
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	00088	

Notes

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight subject to changes after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	23/09/2026		1 / 2	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:		
Product line	: W22 NEMA Premium Efficiency Three-Phase	Product code :	11535558

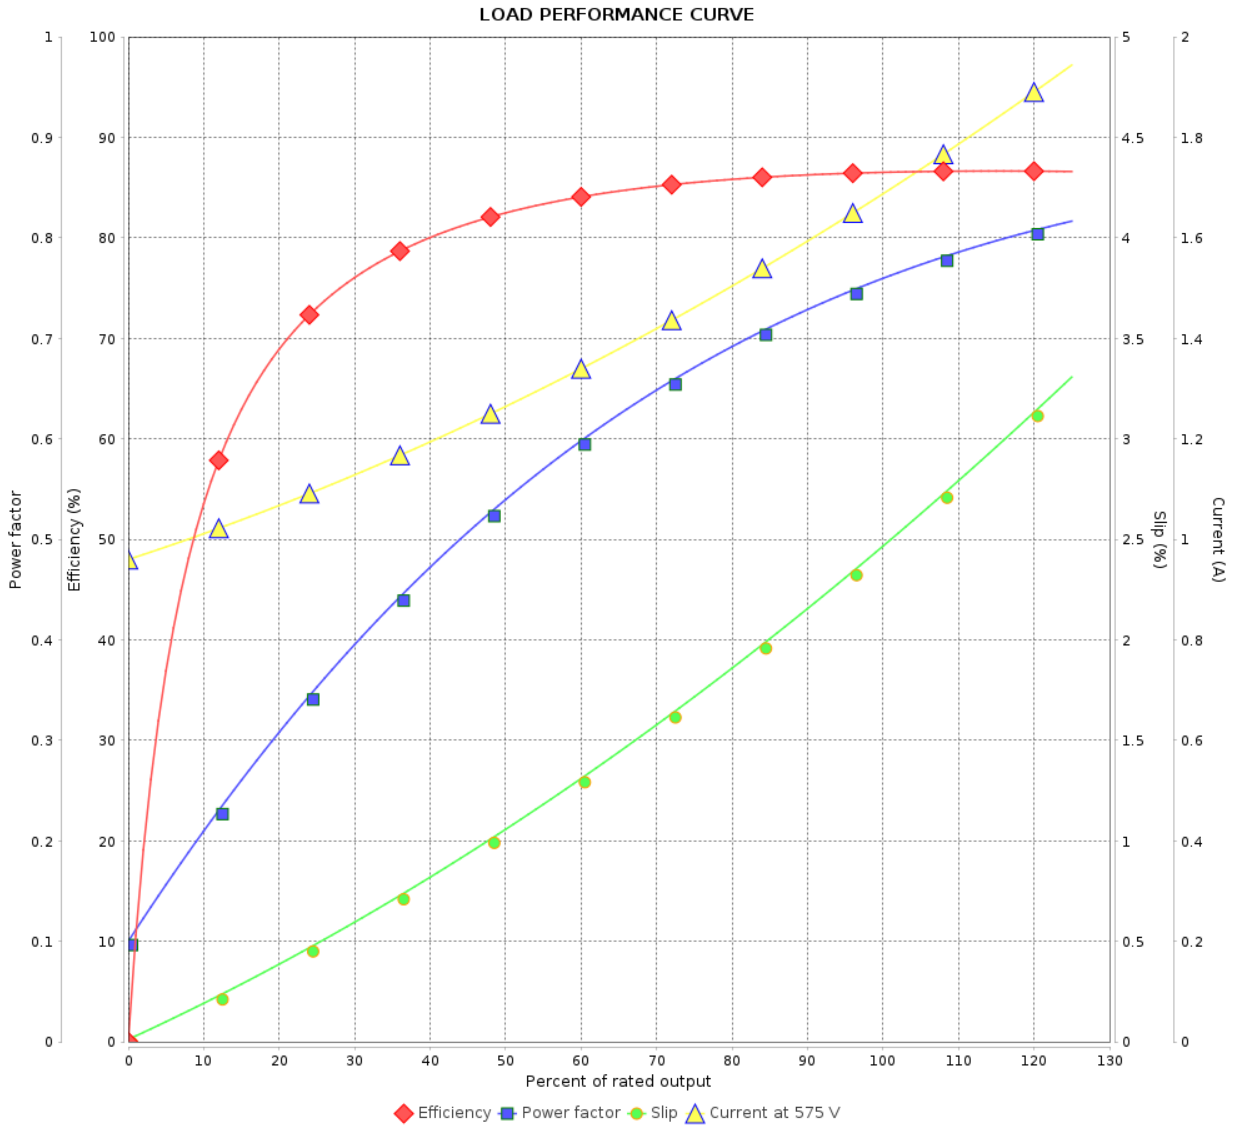

Performance	: 575 V 60 Hz 4P		
Rated current	: 1.68 A	Moment of inertia (J)	: 0.0060 kgm²
LRC	: 8.4	Duty cycle	: Cont.(S1)
Rated torque	: 0 kgfm	Insulation class	: F
Locked rotor torque	: 290 %	Service factor	: 1.25
Breakdown torque	: 350 %	Temperature rise	: 80 K
Rated speed	: 1755 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	23/09/2026		2 / 2	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice