DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer	:

Product line	: W22 - Nema Premium Efficiency
Product code	: 12196637

Frame	: 444/5TSC	Locked rotor time	: 22 s (hot) 40 s (cold)
Output	: 150 HP (110 kW)	Temperature rise[4]	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l
Rated current	: 131 A	Protection degree	: IP55
L. R. Amperes	: 914 A	Cooling method	: IC411 - TEFC
LRC	: 7.0 Code G	Mounting	: B34R(D)
No load current	: 29.2 A	Rotation[1]	: Both
Rated speed	: 3575 rpm	Noise level[2]	: 81 dB(A)
Slip	: 0.69 %	Starting method	: Direct On Line
Rated torque	: 30.5 kgfm	Approx. weight[3]	: 775 kg
Locked rotor torque	: 180 %	Design	: B
Pull up torque	: 125 %		
Breakdown torque	: 240 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 1.65 kgm²		

Output	Start	50%	75%	100%
Efficiency (%)	-	94.1	95.0	95.0
Power Factor	0.33	0.83	0.88	0.89

Load type	: -
Load torque	: -
Load inertia (J=GD²/4)	: -

	Drive end	Non drive end
Bearing type	6314-C3	6314-C3
Lubrication interval	4000 h	4000 h
Lubricant amount	27 g	27 g
Lubricant type	MOBIL POLYREX EM	

Foundation loads	
Max. traction	: 244 kgf
Max. compression	: 1019 kgf

Notes:

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
5.19	3.41	2.70	3.34	1.69	1.28	0.60

Standards

Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated..
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +0dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Performed	Checked	Date
				2026/11/13


Performed by				
Checked by			Page	Revision
Date	2026/11/13		1/2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:
Product line	: W22 - Nema Premium Efficiency
Product code	: 12196637

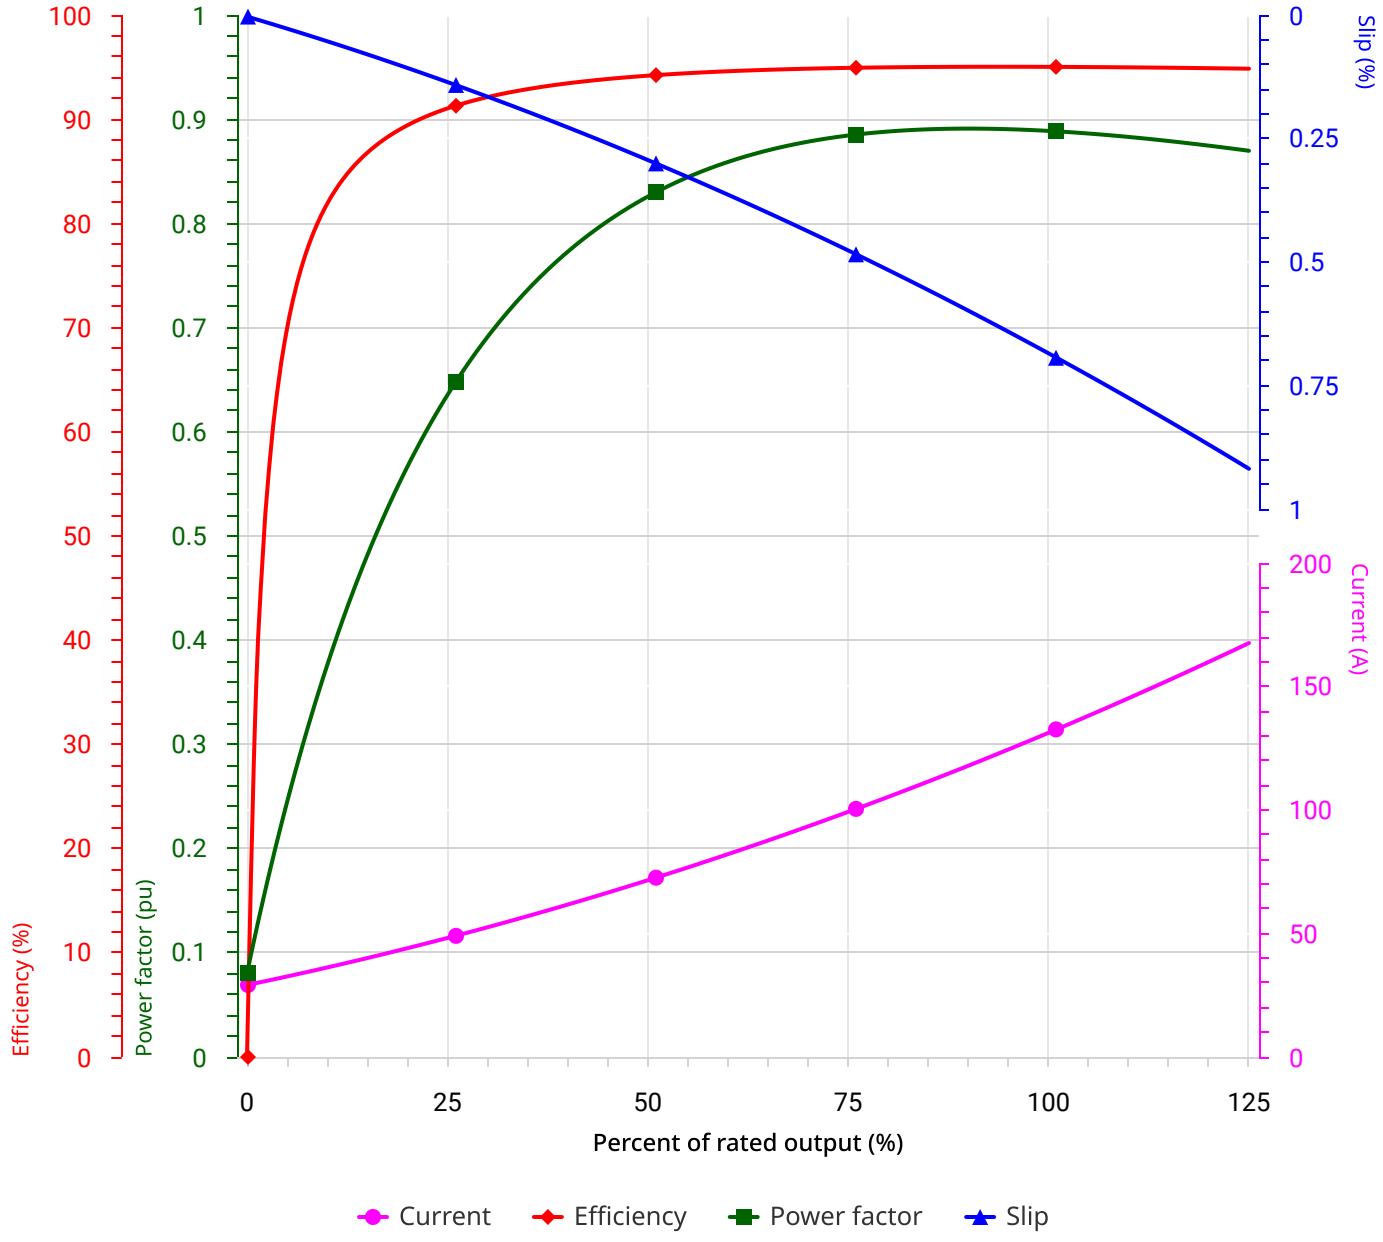

Performance	: 150 HP (110 kW) 575V 60Hz 2P 444/5TSC

Rated current	: 131 A	Moment of inertia (J)	: 1.65 kgm²
LRC	: 7.0 Code G	Duty cycle	: Cont.(S1)
Rated torque	: 30.5 kgfm	Insulation class	: F
Locked rotor torque	: 180 %	Service factor	: 1.15
Breakdown torque	: 240 %	Temperature rise	: 80 K
Rated speed	: 3575 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
				2026/11/13

Performed by				
Checked by			Page	Revision
Date	2026/11/13		2/2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.