DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer	:
Product line	: W22 - Nema Premium Efficiency (Derating)

Frame	: 364/5TS	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: B3R(D)
Duty cycle	: S1	Rotation	: Both
Ambient temperature	: -20 °C to +40 °C	Starting method	: Direct On Line
Altitude	: 1000 m	Approx. weight	: 384 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.5023 kgm²
Design	: B		

Output		75 HP (55 kW)	75 HP (55 kW)
Poles		2	2
Frequency		60 Hz	50 Hz
Rated voltage		230/460 V	380 V
Rated current		164/81.9 A	100 A
L. R. Amperes		1097/549 A	520 A
LRC		6.7 Code G	5.2 Code E
No load current		36.0/18.0 A	19.0 A
Rated speed		3555 rpm	2930 rpm
Slip		1.25 %	2.33 %
Rated torque		15.3 kgfm	18.6 kgfm
Locked rotor torque		200 %	160 %
Breakdown torque		250 %	200 %
Service factor		1.25	1.00
Temperature rise		80 K	105 K
Noise level		79 dB(A)	74 dB(A)
Locked rotor time		10 s (hot) 18 s (cold)	7 s (hot) 13 s (cold)
Efficiency (%)	50%	92.4	92.4
	75%	93.6	93.0
	100%	93.6	92.4
Power Factor	Start	0.38	0.38
	50%	0.83	0.86
	75%	0.88	0.89
	100%	0.9	0.9
Losses at normative operating points (speed;torque), in percentage of rated output power			
P1 (0,9;1,0)		6.38	6.38
P2 (0,5;1,0)		4.83	4.83
P3 (0,25;1,0)		4.52	4.52
P4 (0,9;0,5)		3.18	3.18
P5 (0,5;0,5)		1.78	1.78
P6 (0,5;0,25)		1.07	1.07
P7 (0,25;0,25)		0.60	0.60

	Drive end	Non drive end
Bearing type	6314-C3	6314-C3
Lubrication interval	4000 h	4000 h
Lubricant amount	27 g	27 g
Lubricant type	MOBIL POLYREX EM	

Foundation loads
Max. traction : 233 kgf
Max. compression : 617 kgf

Notes:

Rev.	Changes Summary	Performed	Checked	Date
				2026/11/12


Performed by				
Checked by			Page	Revision
Date	2026/11/12		1/3	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:
Product line	: W22 - Nema Premium Efficiency (Derating)

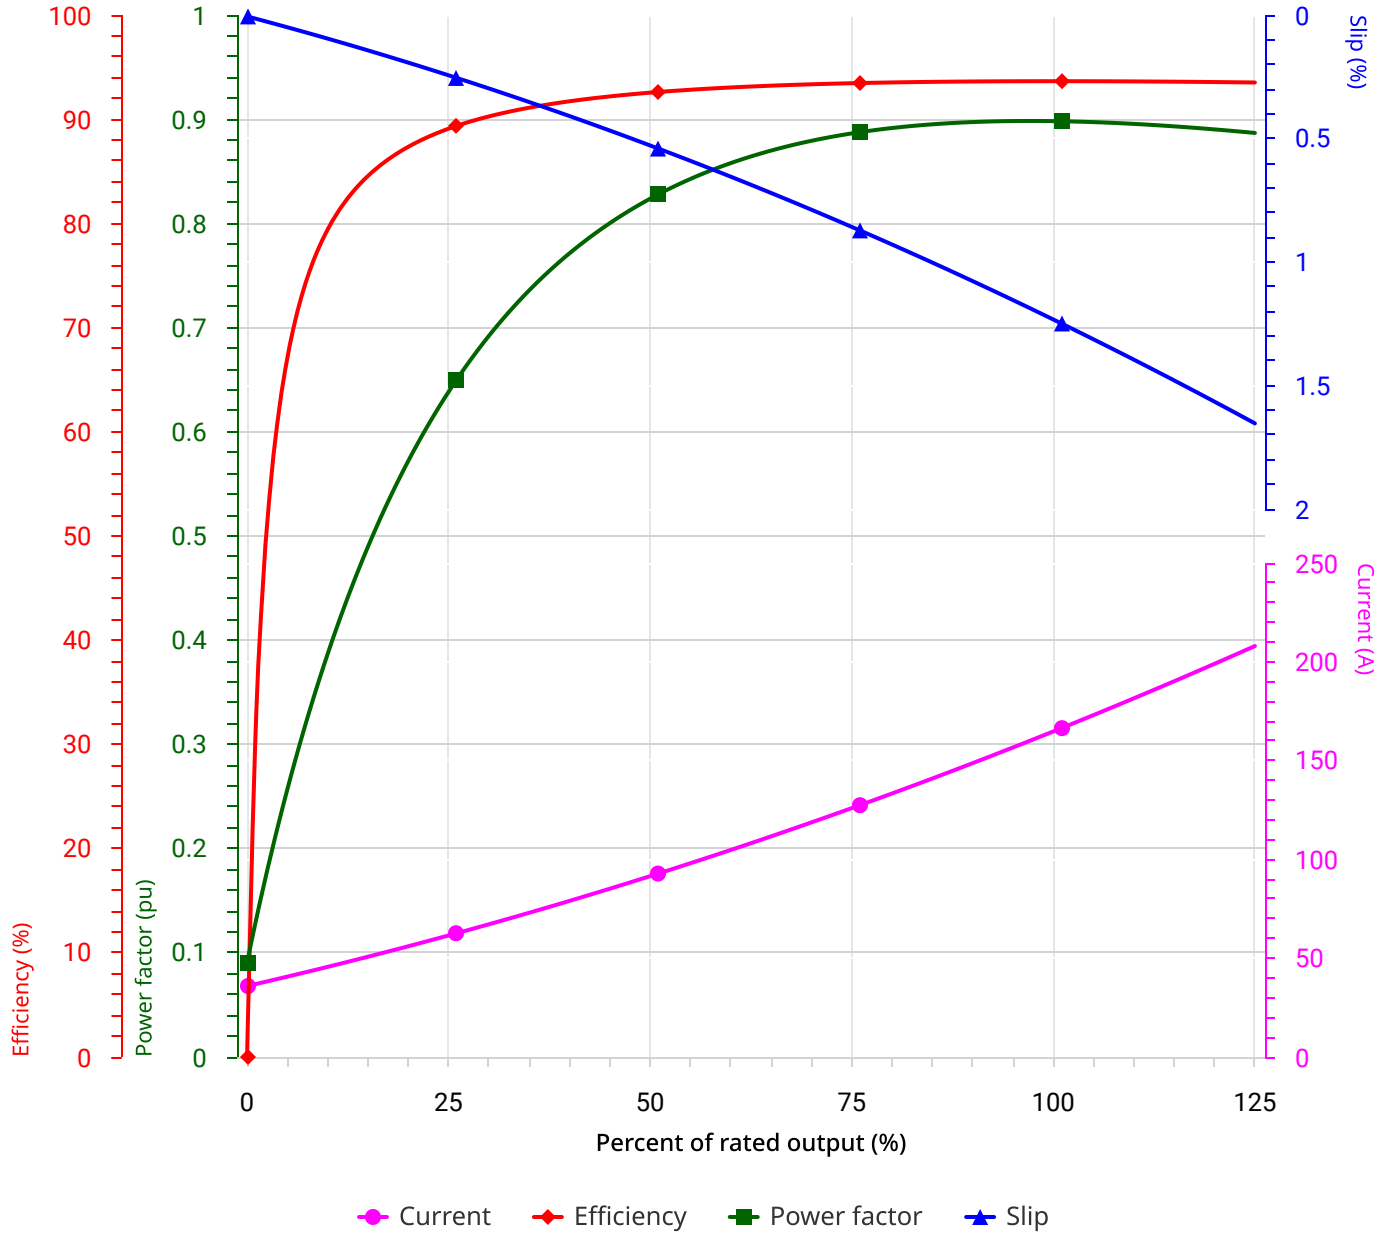

Performance	: 75 HP (55 kW) 208/230/460V 60Hz 2P 364/5TS

Rated current	: 181/164/81.9 A	Moment of inertia (J)	: 0.5023 kgm²
LRC	: 6.7 Code G	Duty cycle	: Cont.(S1)
Rated torque	: 15.3 kgfm	Insulation class	: F
Locked rotor torque	: 200 %	Service factor	: 1.25
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 3555 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
				2026/11/12


Performed by				
Checked by			Page	Revision
Date	2026/11/12		2/3	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:
Product line	: W22 - Nema Premium Efficiency (Derating)

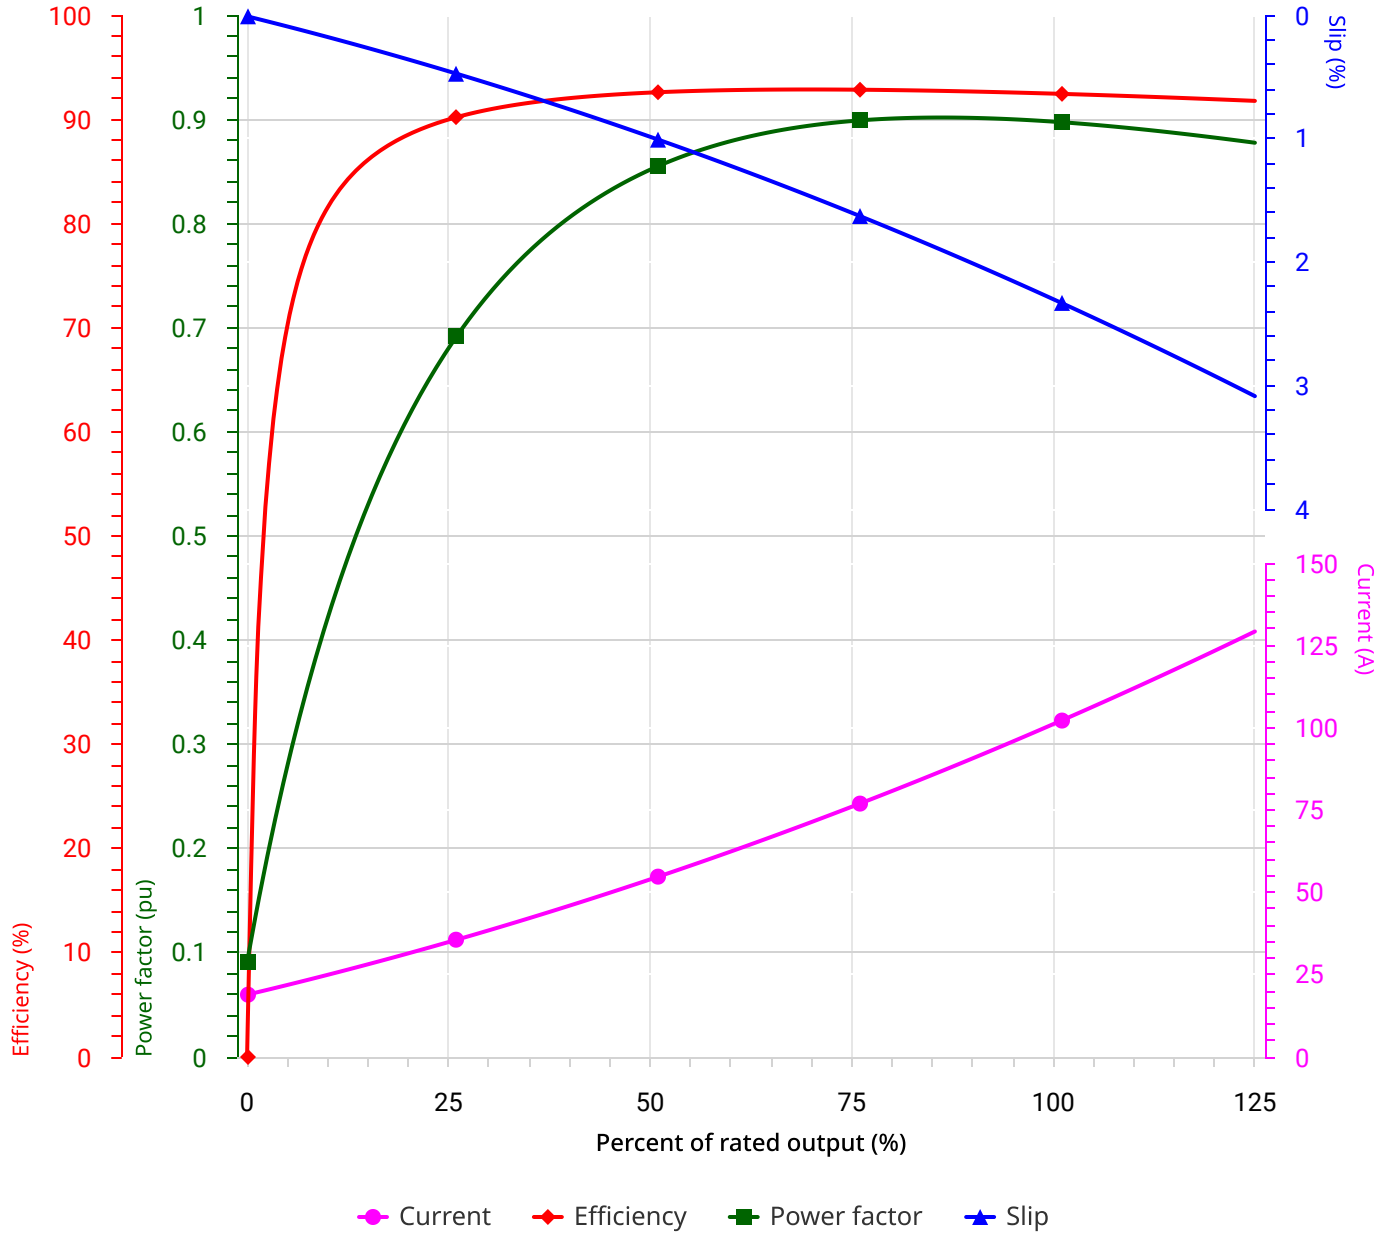

Performance	: 75 HP (55 kW) 380V 50Hz 2P 364/5TS

Rated current	: 100 A	Moment of inertia (J)	: 0.5023 kgm²
LRC	: 5.2 Code E	Duty cycle	: Cont.(S1)
Rated torque	: 18.6 kgfm	Insulation class	: F
Locked rotor torque	: 160 %	Service factor	: 1.00
Breakdown torque	: 200 %	Temperature rise	: 105 K
Rated speed	: 2930 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
				2026/11/12

Performed by				
Checked by			Page	Revision
Date	2026/11/12		3/3	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.