DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : Rolled Steel JM Pump NEMA Premium Efficiency Three-Phase

Product code : 12676958

Frame	: 143/5JM	Cooling method	: IC01 - ODP
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation[1]	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight[3]	: 15.6 kg
Design	: B	Moment of inertia (J)	: 0.0046 kgm²

Output [HP]		1	1	1
Poles		4	4	4
Frequency [Hz]		60	50	50
Rated voltage [V]		230/460	190-220/380	415
Rated current [A]		3.02/1.51	3.44-2.97/1.72	1.67
L. R. Amperes [A]		24.2/12.1	22.4-19.3/11.2	12.5
LRC [A]		8.0x(Code L)	6.5x(Code J)	7.5x(Code L)
No load current [A]		1.92/0.958	1.88-1.63/0.942	1.09
Rated speed [RPM]		1760	1445	1455
Slip [%]		2.22	3.67	3.00
Rated torque [kgfm]		0	0	0
Locked rotor torque [%]		290	200	250
Breakdown torque [%]		360	270	330
Service factor			1.15	1.15
Temperature rise		80 K	80 K	80 K
Locked rotor time		39s (cold) 22s (hot)	0s (cold) 0s (hot)	0s (cold) 0s (hot)
Noise level[2]		52.0 dB(A)	49.0 dB(A)	49.0 dB(A)
Efficiency (%)	25%			
	50%	81.5	81.9	80.1
	75%	84.0	83.4	82.9
	100%	85.5	82.6	83.2
Power Factor	25%			
	50%	0.51	0.59	0.52
	75%	0.65	0.73	0.66
	100%	0.73	0.80	0.75

		Drive end	Non drive end
Bearing type	:	6206 ZZ	6203 ZZ
Sealing	:	Without Bearing Seal	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Foundation loads
Max. traction : 38 kgf
Max. compression : 55 kgf

Notes
USABLE @208V 3.34A SF 1.00 SFA 3.34A

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight subject to changes after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	08/10/2026		1 / 4	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:		
Product line	: Rolled Steel JM Pump NEMA Premium Efficiency Three-Phase	Product code :	12676958

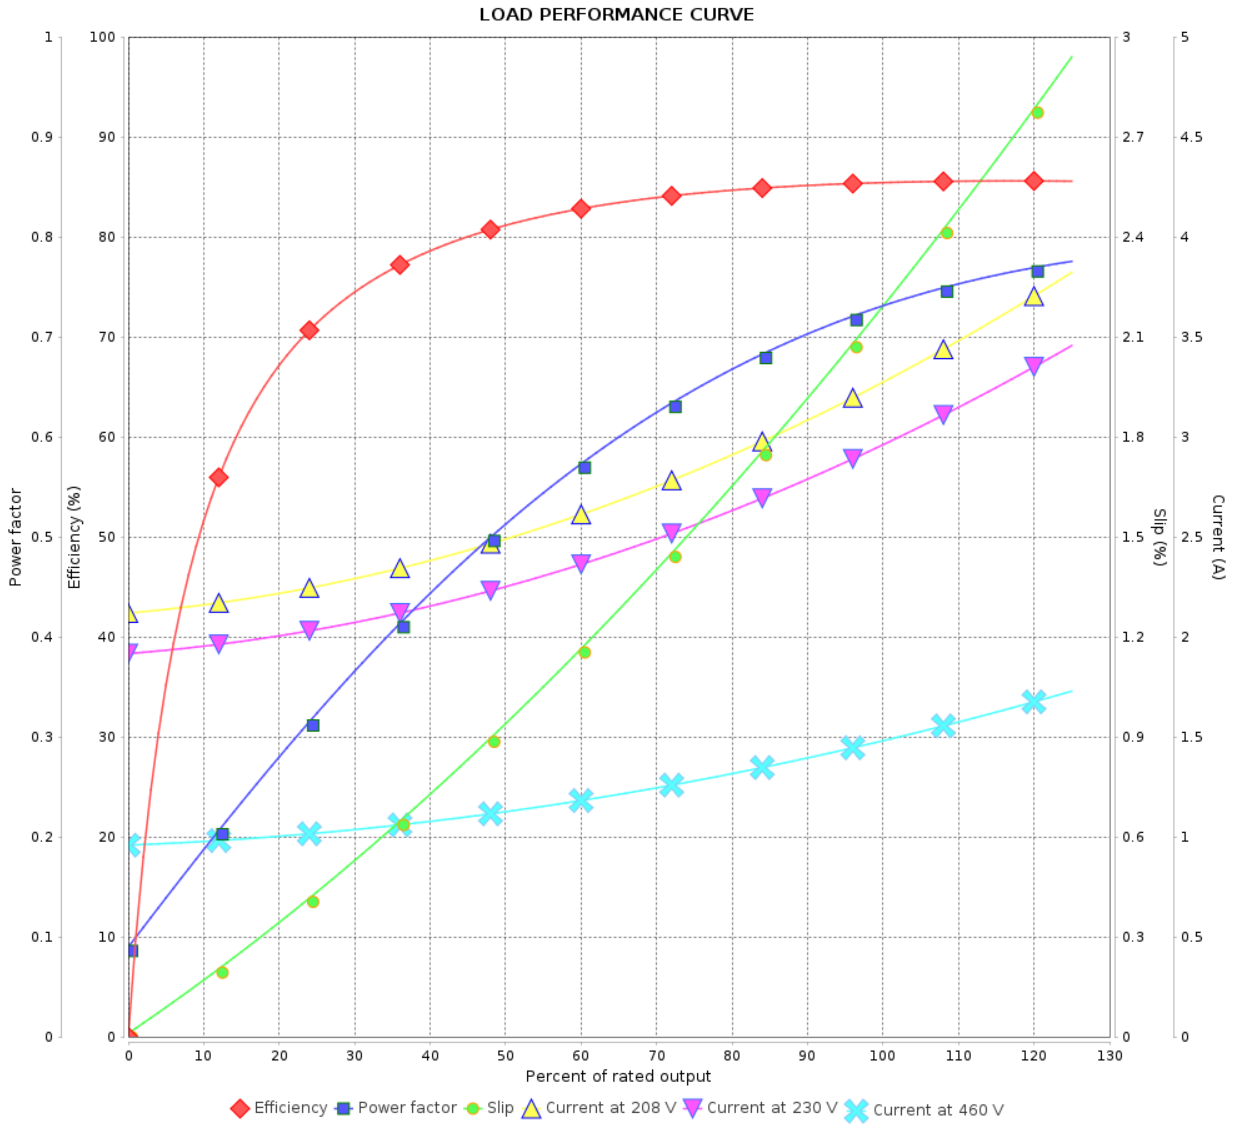

Performance	: 230/460 V 60 Hz 4P		
Rated current	: 3.02/1.51 A	Moment of inertia (J)	: 0.0046 kgm²
LRC	: 8.0	Duty cycle	: Cont.(S1)
Rated torque	: 0 kgfm	Insulation class	: F
Locked rotor torque	: 290 %	Service factor	:
Breakdown torque	: 360 %	Temperature rise	: 80 K
Rated speed	: 1760 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	08/10/2026		2 / 4	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:		
Product line	: Rolled Steel JM Pump NEMA Premium Efficiency Three-Phase	Product code :	12676958

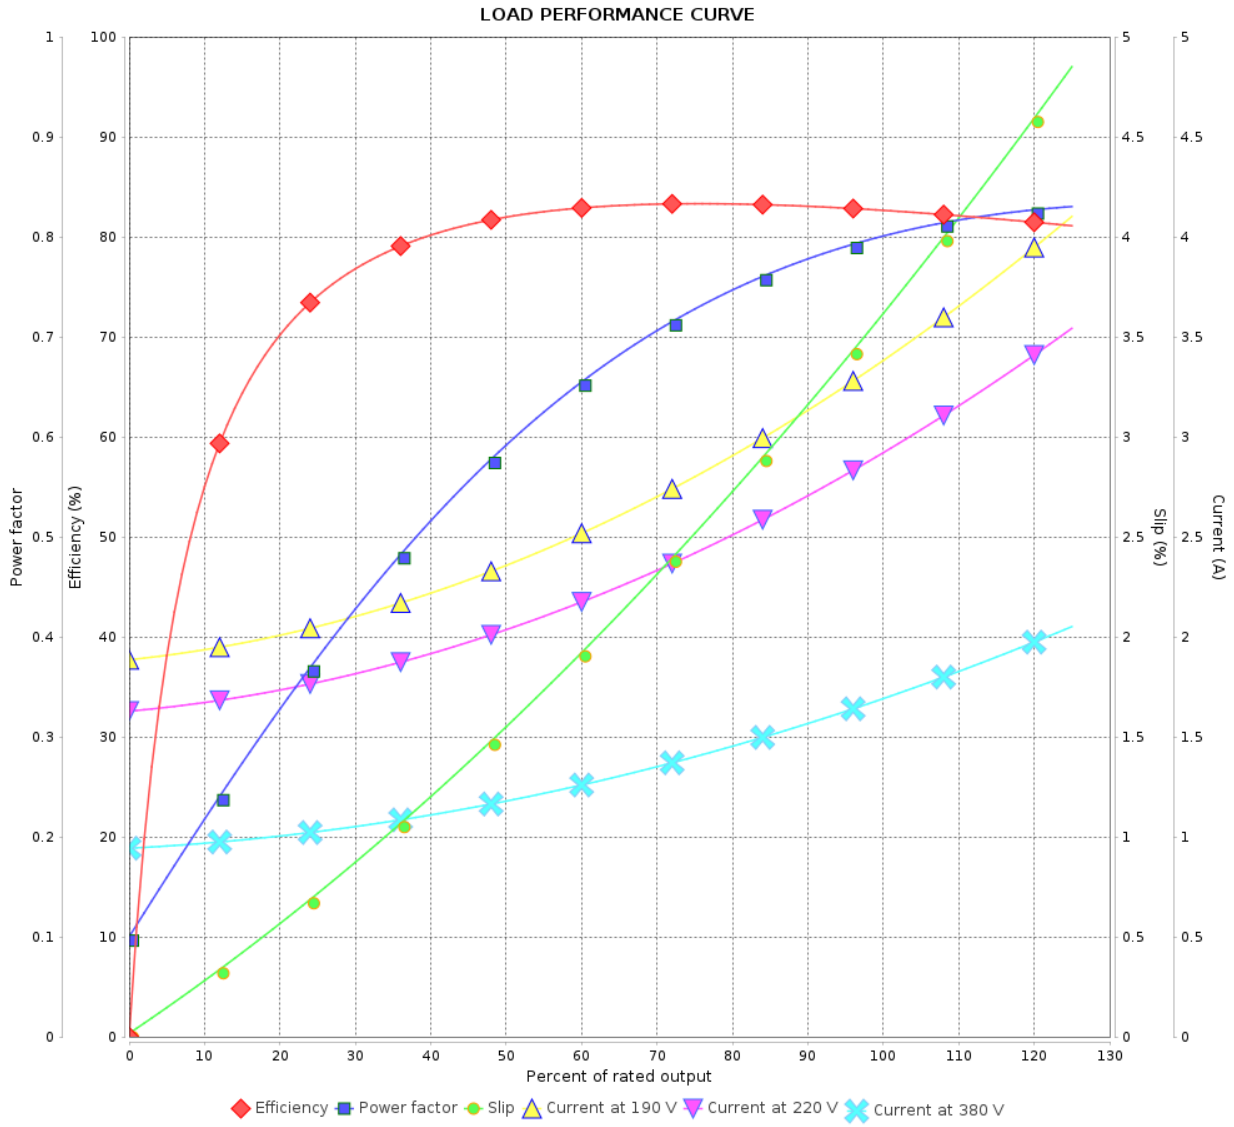

Performance	: 190-220/380 V 50 Hz 4P		
Rated current	: 3.44-2.97/1.72 A	Moment of inertia (J)	: 0.0046 kgm²
LRC	: 6.5	Duty cycle	: Cont.(S1)
Rated torque	: 0 kgfm	Insulation class	: F
Locked rotor torque	: 200 %	Service factor	: 1.15
Breakdown torque	: 270 %	Temperature rise	: 80 K
Rated speed	: 1445 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	08/10/2026		3 / 4	


This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:

Product line	: Rolled Steel JM Pump NEMA Premium Efficiency Three-Phase	Product code :	12676958

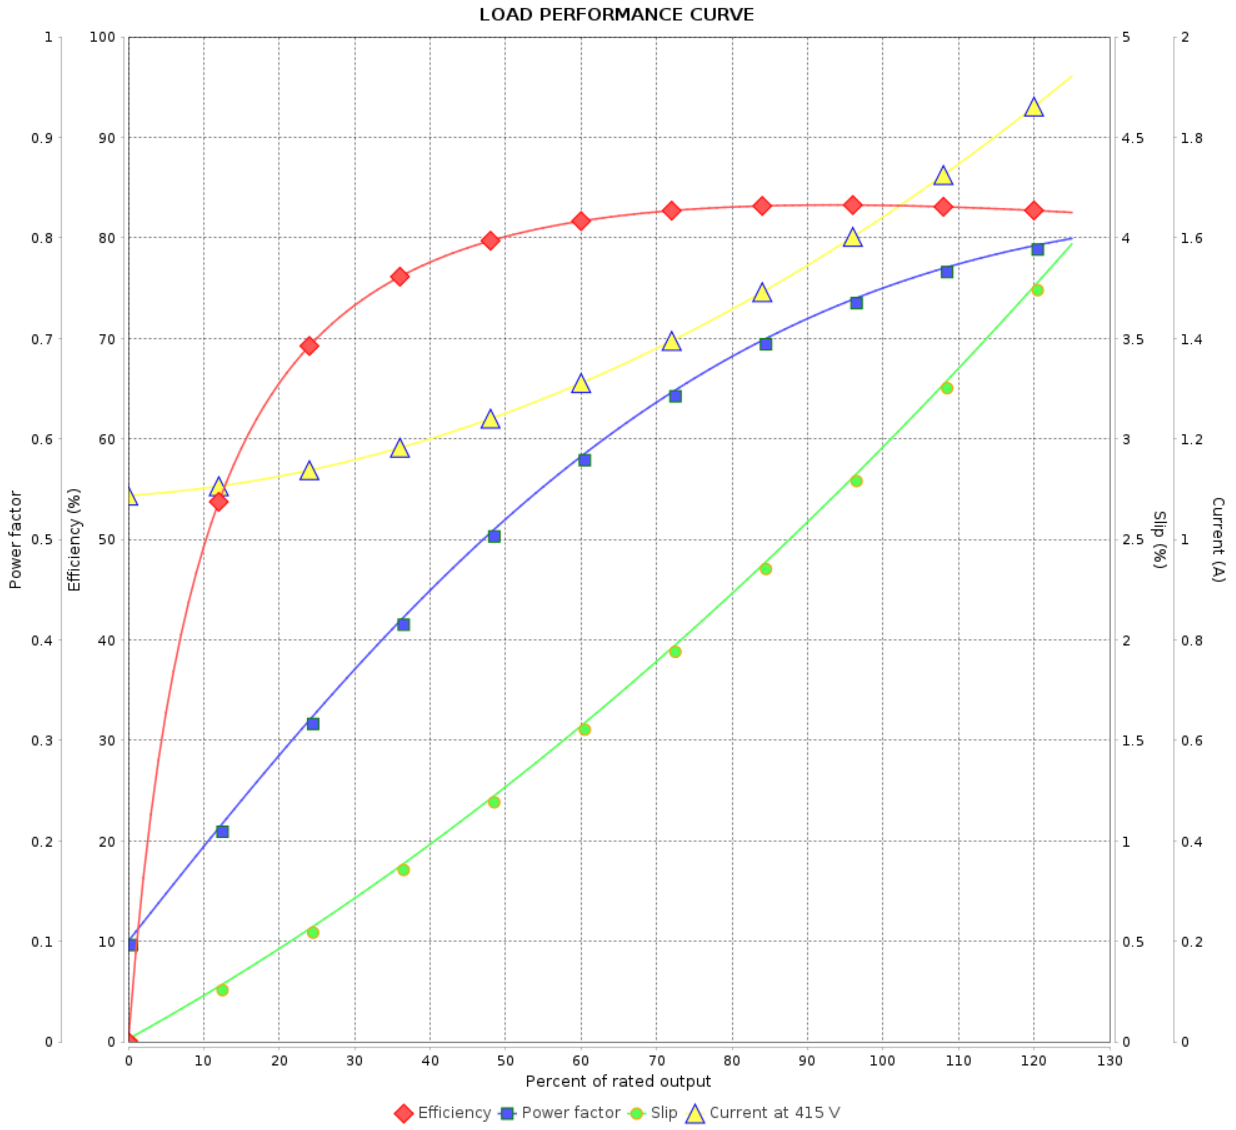

Performance	: 415 V 50 Hz 4P

Rated current	: 1.67 A	Moment of inertia (J)	: 0.0046 kgm²
LRC	: 7.5	Duty cycle	: Cont.(S1)
Rated torque	: 0 kgfm	Insulation class	: F
Locked rotor torque	: 250 %	Service factor	: 1.15
Breakdown torque	: 330 %	Temperature rise	: 80 K
Rated speed	: 1455 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	08/10/2026		4 / 4	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice