DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer	:

Product line	: W22 Jet Pump Motors JM - Nema Premium Efficiency
Product code	: 12598691

Frame	: 182/4JM	Locked rotor time	: 26 s (hot) 47 s (cold)
Output	: 3 HP (2.2 kW)	Temperature rise[4]	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l
Rated current	: 3.01 A	Protection degree	: IP55
L. R. Amperes	: 25.9 A	Cooling method	: IC411 - TEFC
LRC	: 8.6 Code K	Mounting	: B34R(D)
No load current	: 1.28 A	Rotation[1]	: Both
Rated speed	: 3515 rpm	Noise level[2]	: 66 dB(A)
Slip	: 2.36 %	Starting method	: Direct On Line
Rated torque	: 0.619 kgfm	Approx. weight[3]	: 40.0 kg
Locked rotor torque	: 250 %	Design	: B
Pull up torque	: 210 %		
Breakdown torque	: 380 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.008 kgm²		

Output	Start	50%	75%	100%
Efficiency (%)	-	82.0	86.0	86.5
Power Factor	0.52	0.70	0.80	0.85

Load type	: -
Load torque	: -
Load inertia (J=GD²/4)	: -

	Drive end	Non drive end
Bearing type	6307-ZZ	6206-ZZ
Lubrication interval	-	-
Lubricant amount	-	-
Lubricant type	POLYUREA BASED GREASE	

Foundation loads	
Max. traction	: 29 kgf
Max. compression	: 69 kgf

Notes:
Naval Certification Organism: NOT APPLICABLE
Naval Service: NOT APPLICABLE

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
14.56	10.65	9.38	8.33	4.52	3.13	1.80

Standards

Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated..
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +0dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Performed	Checked	Date
				2026/10/30


Performed by				
Checked by			Page	Revision
Date	2026/10/30		1/2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:
Product line	: W22 Jet Pump Motors JM - Nema Premium Efficiency
Product code	: 12598691

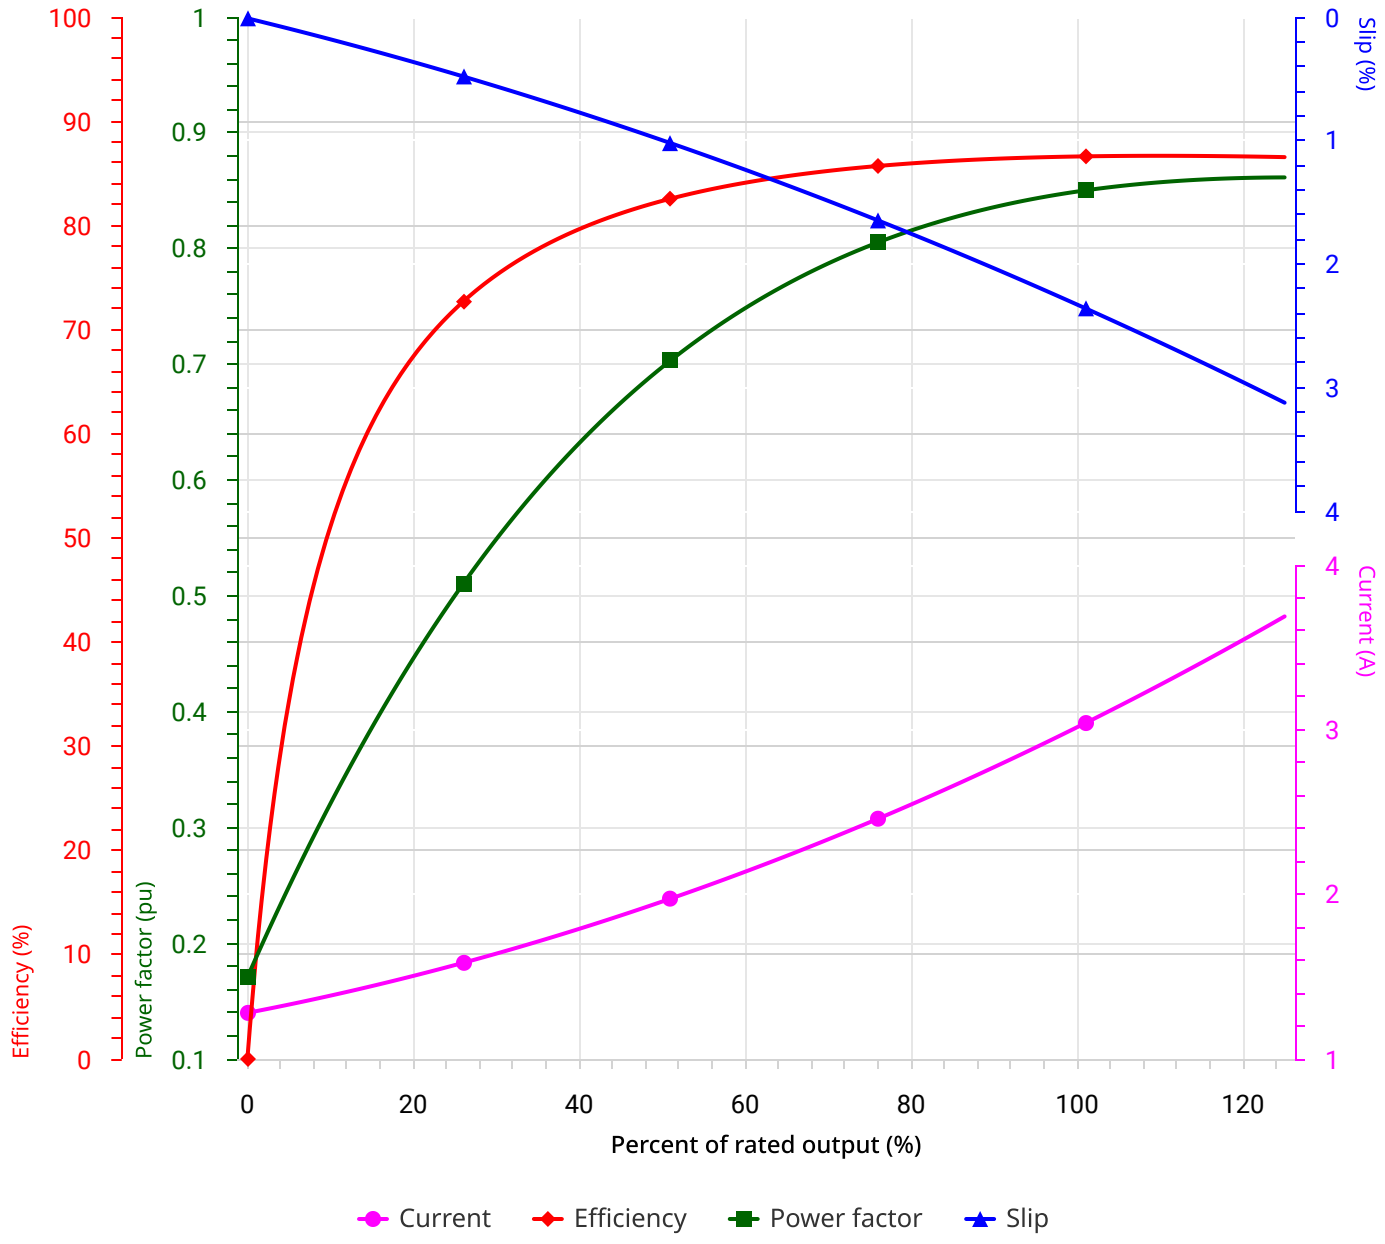

Performance	: 3 HP (2.2 kW) 575V 60Hz 2P 182/4JM		
Rated current	: 3.01 A	Moment of inertia (J)	: 0.008 kgm²
LRC	: 8.6 Code K	Duty cycle	: Cont.(S1)
Rated torque	: 0.619 kgfm	Insulation class	: F
Locked rotor torque	: 250 %	Service factor	: 1.25
Breakdown torque	: 380 %	Temperature rise	: 80 K
Rated speed	: 3515 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
				2026/10/30

Performed by				
Checked by			Page	Revision
Date	2026/10/30		2/2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.