DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer	:

Product line	: W22 Jet Pump Motors JM - Nema Premium Efficiency - Derating
Product code	: 12602709

Frame	: 284/6JM	Locked rotor time	: 24 s (hot) 43 s (cold)
Output	: 25 HP (18.5 kW)	Temperature rise[4]	: 80 K
Poles	: 4	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 230/460 V	Altitude	: 1000 m.a.s.l
Rated current	: 59.0/29.5 A	Protection degree	: IP55
L. R. Amperes	: 366/183 A	Cooling method	: IC411 - TEFC
LRC	: 6.2 Code G	Mounting	: B34R(D)
No load current	: 22.0/11.0 A	Rotation[1]	: Both
Rated speed	: 1770 rpm	Noise level[2]	: 63 dB(A)
Slip	: 1.67 %	Starting method	: Direct On Line
Rated torque	: 10.3 kgfm	Approx. weight[3]	: 191 kg
Locked rotor torque	: 240 %	Design	: B
Pull up torque	: 200 %		
Breakdown torque	: 270 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.2153 kgm²		

Output	Start	50%	75%	100%
Efficiency (%)	-	92.4	93.0	93.6
Power Factor	0.44	0.70	0.80	0.84

Load type	: -
Load torque	: -
Load inertia (J=GD²/4)	: -

	Drive end	Non drive end
Bearing type	6311-C3	6211-C3
Lubrication interval	20000 h	20000 h
Lubricant amount	18 g	11 g
Lubricant type	MOBIL POLYREX EM	

Foundation loads	
Max. traction	: 296 kgf
Max. compression	: 487 kgf

Notes:

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
6.75	5.83	5.32	3.15	2.23	1.42	1.01

Standards

Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated..
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +0dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Performed	Checked	Date
				2026/10/27


Performed by				
Checked by			Page	Revision
Date	2026/10/27		1/2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:
Product line	: W22 Jet Pump Motors JM - Nema Premium Efficiency - Derating
Product code	: 12602709

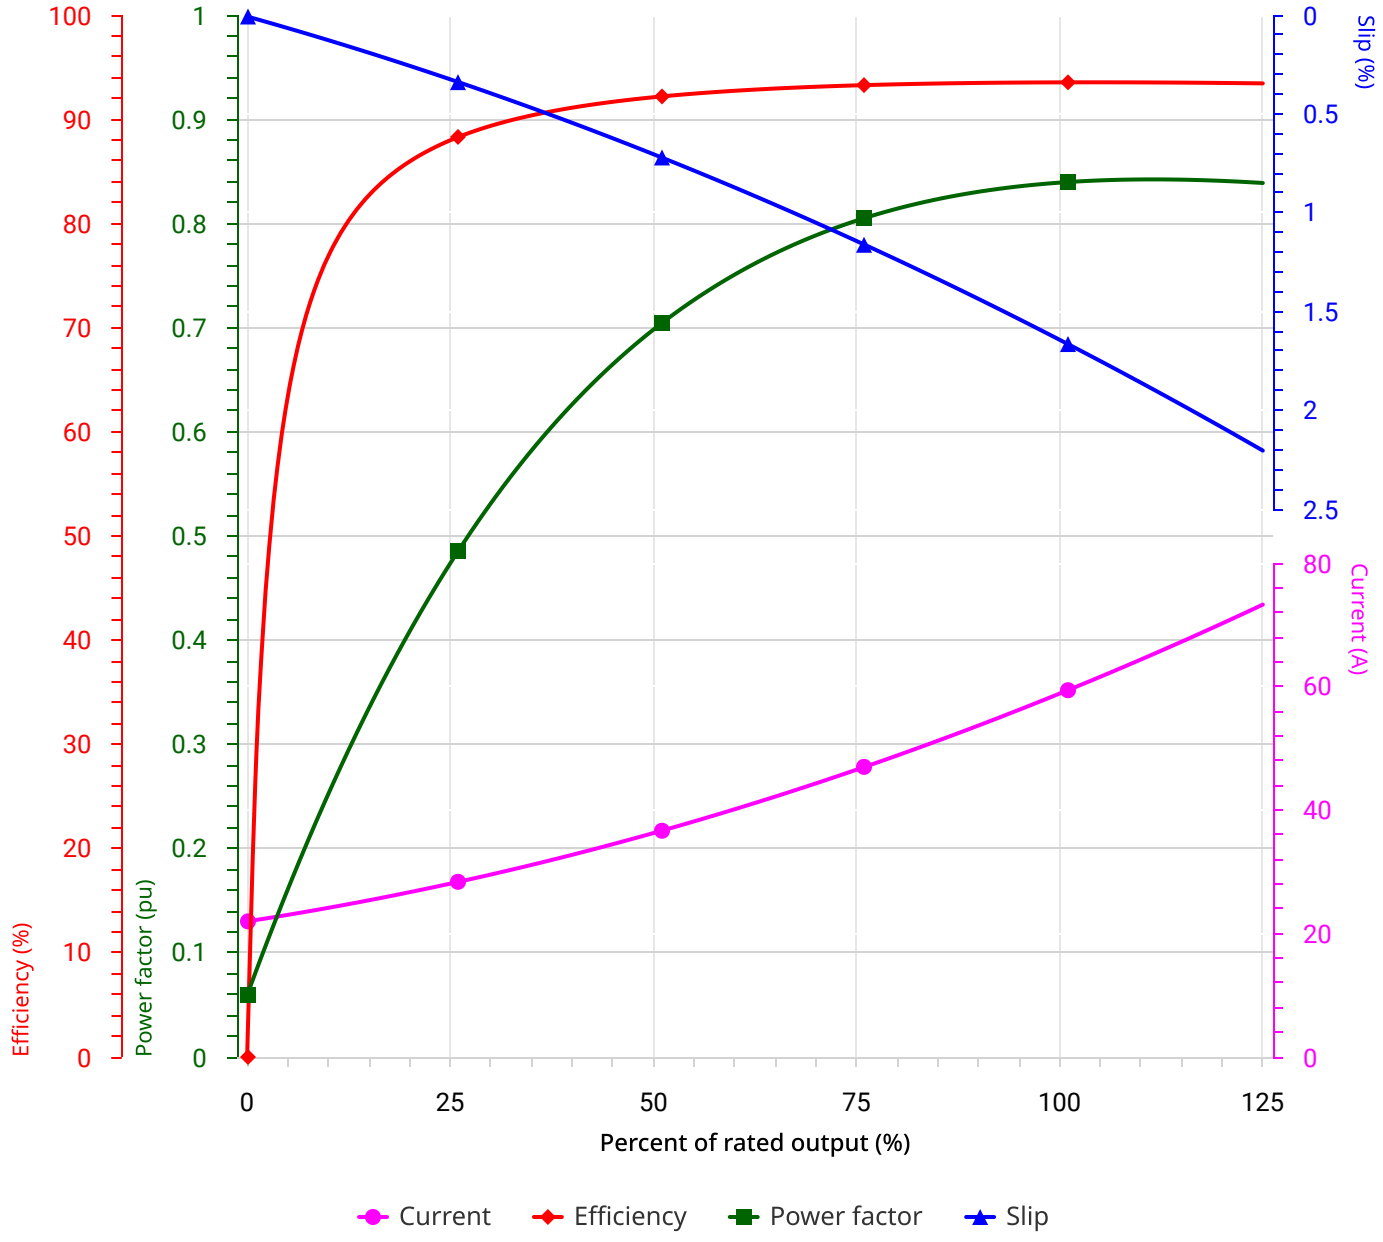

Performance	: 25 HP (18.5 kW) 208/230/460V 60Hz 4P 284/6JM

Rated current	: 65.2/59.0/29.5 A	Moment of inertia (J)	: 0.2153 kgm²
LRC	: 6.2 Code G	Duty cycle	: Cont.(S1)
Rated torque	: 10.3 kgfm	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.25
Breakdown torque	: 270 %	Temperature rise	: 80 K
Rated speed	: 1770 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
				2026/10/27

Performed by				
Checked by			Page	Revision
Date	2026/10/27		2/2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.