DATA SHEET

Three Phase Induction Motor - Squirrel Cage

PRELIMINARY DOCUMENT

Customer	:

Product line	: W22 Jet Pump Motors JP - Nema Premium Efficiency - Derating
Product code	: 12038012

Frame	: 213/5	Locked rotor time	: 15 s (hot) 27 s (cold)
Output	: 10 HP (7.5 kW)	Temperature rise[4]	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 230/460 V	Altitude	: 1000 m.a.s.l
Rated current	: 23.2/11.6 A	Protection degree	: IP55
L. R. Amperes	: 167/83.5 A	Cooling method	: IC411 - TEFC
LRC	: 7.2 Code H	Mounting	: B34R(D)
No load current	: 7.00/3.50 A	Rotation[1]	: Both
Rated speed	: 3530 rpm	Noise level[2]	: 68 dB(A)
Slip	: 1.94 %	Starting method	: Direct On Line
Rated torque	: 2.06 kgfm	Approx. weight[3]	: 81.9 kg
Locked rotor torque	: 220 %	Design	: B
Pull up torque	: 170 %		
Breakdown torque	: 290 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.0268 kgm²		

Output	Start	50%	75%	100%
Efficiency (%)	-	89.5	90.2	90.2
Power Factor	0.49	0.79	0.87	0.9

Load type	: -	
Load torque	: -	
Load inertia (J=GD²/4)	: -	

	Drive end	Non drive end
Bearing type	6309-Z-C3	6207-ZZ
Lubrication interval	19000 h	-
Lubricant amount	13 g	-
Lubricant type	MOBIL POLYREX EM	

Foundation loads

Max. traction	: 68 kgf
Max. compression	: 150 kgf

Notes:

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
10.64	8.88	8.18	5.08	3.27	2.03	1.29

Standards

Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated..
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +0dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Performed	Checked	Date

Performed by	
Checked by	
Date	2026/10/20


This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

PRELIMINARY DOCUMENT

Customer	:
Product line	: W22 Jet Pump Motors JP - Nema Premium Efficiency - Derating
Product code	: 12038012

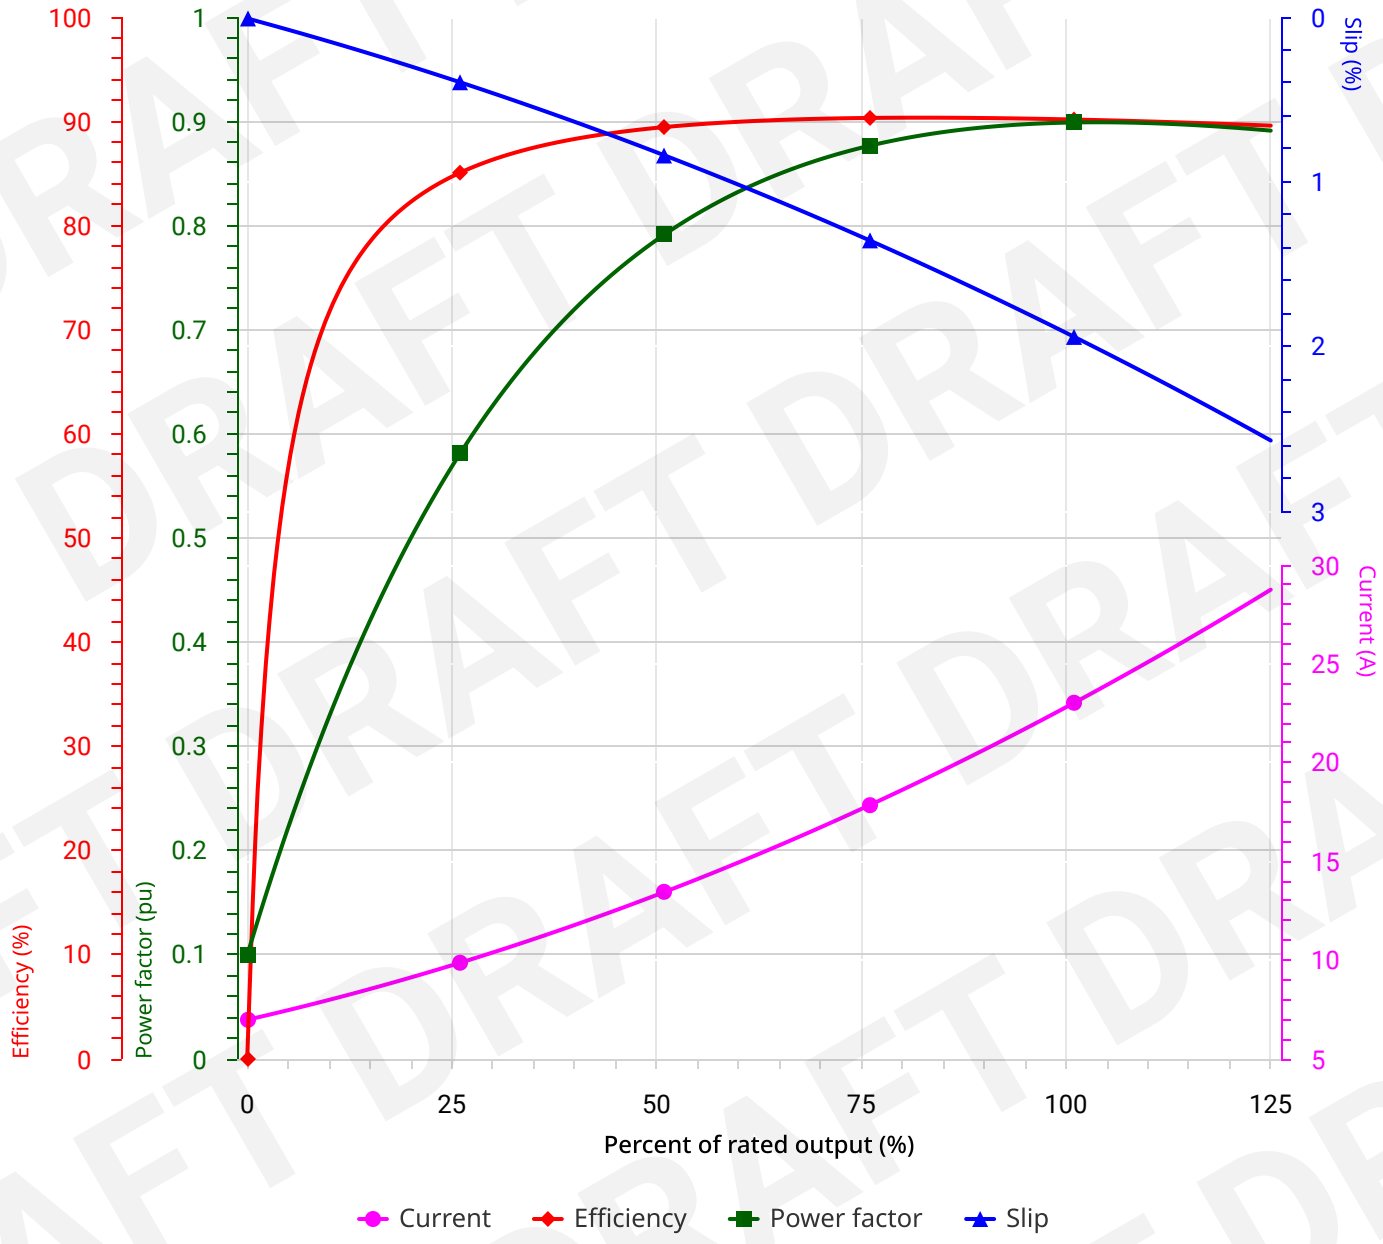

Performance	: 10 HP (7.5 kW) 208/230/460V 60Hz 2P 213/5

Rated current	: 25.7/23.2/11.6 A	Moment of inertia (J)	: 0.0268 kgm²
LRC	: 7.2 Code H	Duty cycle	: Cont.(S1)
Rated torque	: 2.06 kgfm	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.25
Breakdown torque	: 290 %	Temperature rise	: 80 K
Rated speed	: 3530 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	2026/10/20		2/2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.