DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 Jet Pump Motors JP - Nema Premium Efficiency
Product code : 15858654

Frame	: 213/5JP
Output	: 15 HP (11 kW)
Poles	: 2
Frequency	: 60 Hz
Rated voltage	: 575 V
Rated current	: 14.0 A
L. R. Amperes	: 123 A
LRC	: 8.8 Code K
No load current	: 5.28 A
Rated speed	: 3535 rpm
Slip	: 1.81 %
Rated torque	: 3.08 kgfm
Locked rotor torque	: 280 %
Pull up torque	: 195 %
Breakdown torque	: 350 %
Insulation class	: F
Service factor	: 1.25
Moment of inertia (J)	: 0.0268 kgm²

Locked rotor time	: 7 s (hot) 13 s (cold)
Temperature rise[4]	: 80 K
Duty cycle	: S1
Ambient temperature	: -20 °C to +40 °C
Altitude	: 1000 m.a.s.l
Protection degree	: IP55
Cooling method	: IC411 - TEFC
Mounting	: B34R(D)
Rotation[1]	: Both
Noise level[2]	: 68 dB(A)
Starting method	: Direct On Line
Approx. weight[3]	: 82.0 kg
Design	: B

Output	Start	50%	75%	100%
Efficiency (%)	-	89.0	90.5	91.0
Power Factor	0.51	0.73	0.82	0.87

Load type	: Parabolic torque
Load torque	: 3.08 kgfm
Load inertia (J=GD²/4)	: 0.0268 kgm²

	Drive end	Non drive end
Bearing type	6309-Z-C3	6207-ZZ
Lubrication interval	19000 h	-
Lubricant amount	13 g	-
Lubricant type	MOBIL POLYREX EM	

Foundation loads
Max. traction : 156 kgf
Max. compression : 238 kgf

Notes:

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
9.80	7.95	7.03	5.18	3.36	2.34	1.50

Standards

Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated..
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +0dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Performed	Checked	Date
				19/10/2026


Performed by	airtons		38327/2021	
Checked by	AUTOMATICO		Page	Revision
Date	19/10/2026		1/2	4

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:
Product line	: W22 Jet Pump Motors JP - Nema Premium Efficiency
Product code	: 15858654

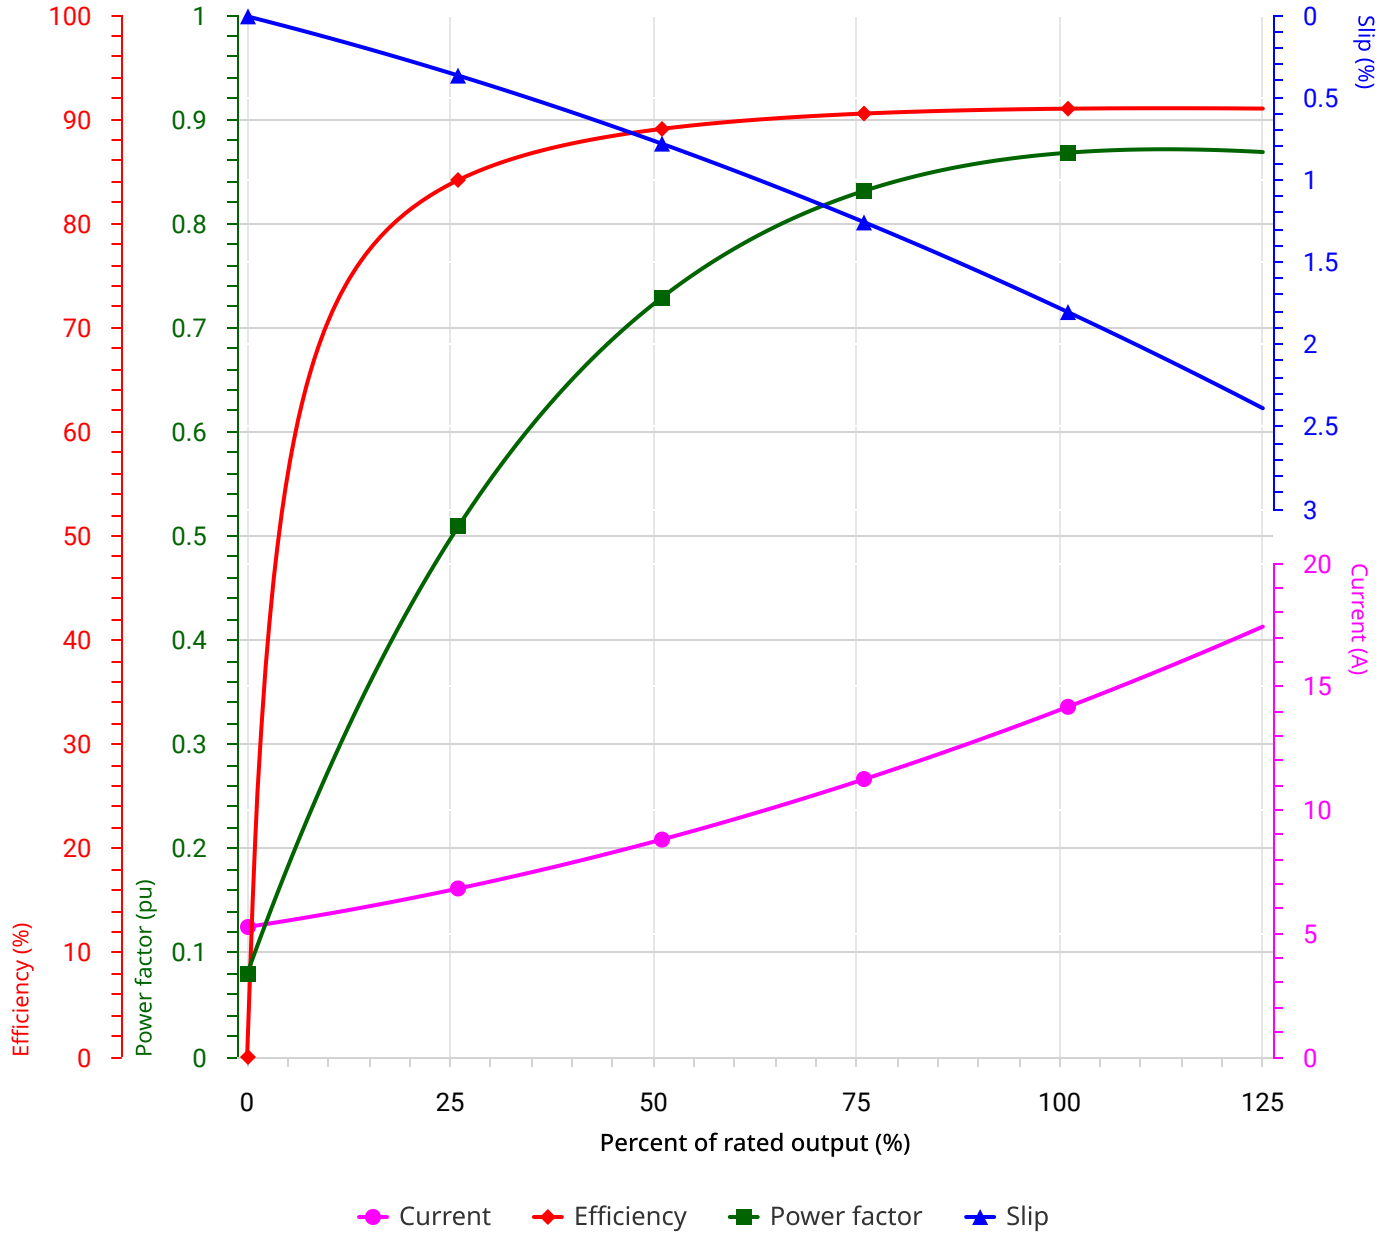

Performance	: 15 HP (11 kW) 575V 60Hz 2P 213/5JP

Rated current	: 14.0 A	Moment of inertia (J)	: 0.0268 kgm²
LRC	: 8.8 Code K	Duty cycle	: Cont.(S1)
Rated torque	: 3.08 kgfm	Insulation class	: F
Locked rotor torque	: 280 %	Service factor	: 1.25
Breakdown torque	: 350 %	Temperature rise	: 80 K
Rated speed	: 3535 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
				19/10/2026

Performed by	airtons		38327/2021	
Checked by	AUTOMATICO		Page	Revision
Date	19/10/2026		2/2	4

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.