DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer	:
Sales document	: 4532959-20

Product line	: Special Motor
Product code	: 14042429

Frame	: 284/6JP
Output	: 40 HP (30 kW)
Poles	: 2
Frequency	: 60 Hz
Rated voltage	: 575 V
Rated current	: 37.0 A
L. R. Amperes	: 318 A
LRC	: 8.6
No load current	: 10.0 A
Rated speed	: 3550 rpm
Slip	: 1.39 %
Rated torque	: 8.18 kgfm
Locked rotor torque	: 310 %
Pull up torque	: 230 %
Breakdown torque	: 320 %
Insulation class	: F
Service factor	: 1.25
Moment of inertia (J)	: 0.1243 kgm²

Locked rotor time	: 7 s (hot) 13 s (cold)
Temperature rise[4]	: 80 K
Duty cycle	: S1
Ambient temperature	: -20 °C to +40 °C
Altitude	: 1000 m.a.s.l
Protection degree	: IP55
Cooling method	: IC411 - TEFC
Mounting	: B34R(D)
Rotation[1]	: Both
Noise level[2]	: 72 dB(A)
Starting method	: Direct On Line
Approx. weight[3]	: 213 kg
Design	: A

Output	Start	50%	75%	100%
Efficiency (%)	-	91.7	92.4	92.4
Power Factor	0.00	0.76	0.85	0.88

Load type	: -
Load torque	: -
Load inertia (J=GD²/4)	: -

	Drive end	Non drive end
Bearing type	6311-C3	6211-C3
Lubrication interval	14000 h	17000 h
Lubrication amount	18 g	11 g
Lubricant type	MOBIL POLYREX EM	

Notes:
W22 - NEMA Premium Efficiency.

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
0.00	0.00	0.00	0.00	0.00	0.00	0.00

Standards

Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated..
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +0dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Performed	Checked	Date
				03/11/2020


Performed by	yasmim	115950/2017	
Checked by	lkuhlmann	Page	Revision
Date	03/11/2020	1/2	2

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:
Sales document	: 4532959-20
Product line	: Special Motor
Product code	: 14042429

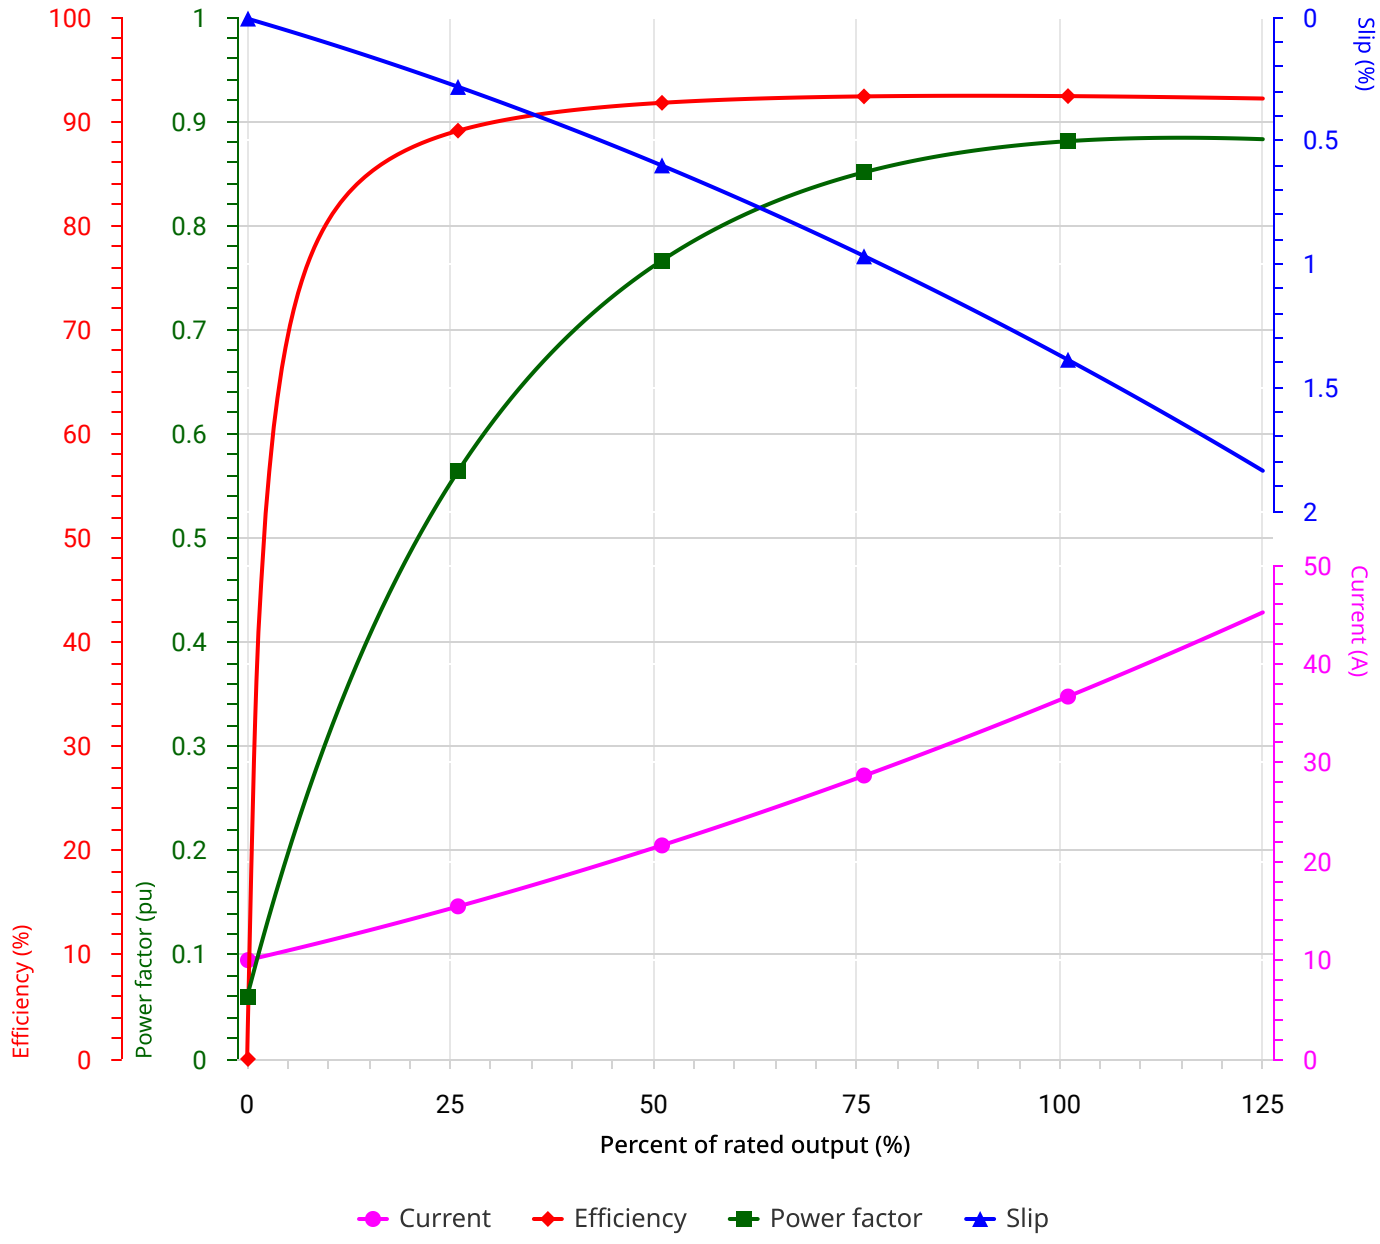

Performance	: 40 HP (30 kW) 575V 60Hz 2P 284/6JP

Rated current	: 37.0 A	Moment of inertia (J)	: 0.1243 kgm²
LRC	: 8.6	Duty cycle	: Cont.(S1)
Rated torque	: 8.18 kgfm	Insulation class	: F
Locked rotor torque	: 310 %	Service factor	: 1.25
Breakdown torque	: 320 %	Temperature rise	: 80 K
Rated speed	: 3550 rpm	Design	: A

Rev.	Changes Summary	Performed	Checked	Date
				03/11/2020

Performed by	yasmim		115950/2017	
Checked by	lkuhlmann		Page	Revision
Date	03/11/2020		2/2	2

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.